









| REV. | DESCRIPTION | DATE | DRAWN |
|------|----------------|------------|-------|
| A | New | 10.11.2006 | RH |
| C | general update | 15.03.2017 | RH |
| D | general update | 27.02.2018 | Ronny |
| E | update | 05.08.2019 | Ronny |

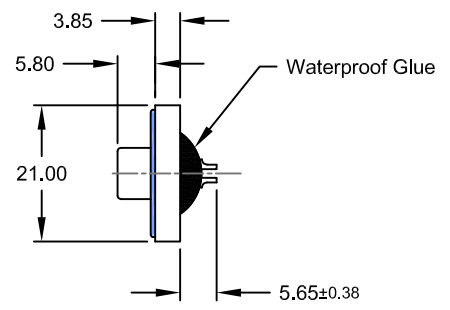

Order Code
SDF-xxx-SIP01-55/TXX

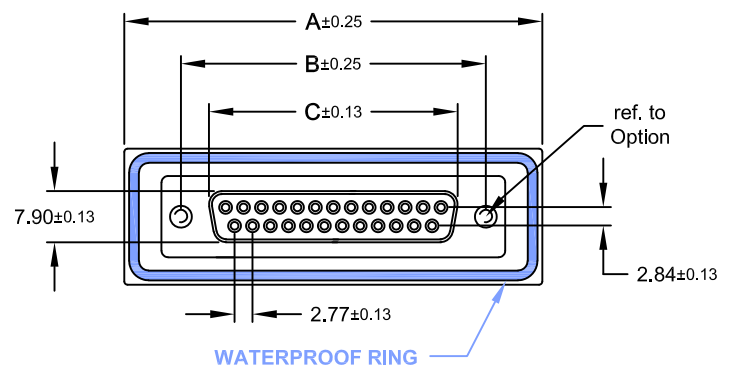

| Dimension mm | | | | | No. of Contact |
|--------------|-------|-------|-------|-------|----------------|
| A | B | C | D | E | |
| 39,40 | 24,99 | 16,33 | 20,00 | 28,20 | 009 |
| 47,70 | 33,32 | 24,66 | 28,00 | 36,50 | 015 |
| 64,50 | 47,04 | 38,38 | 41,50 | 51,00 | 025 |

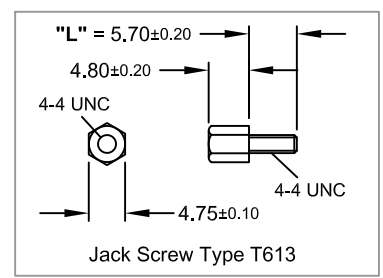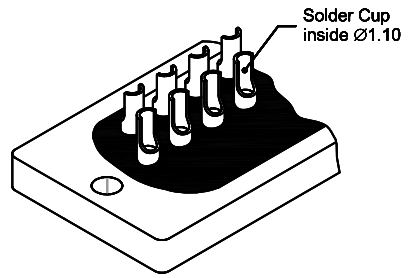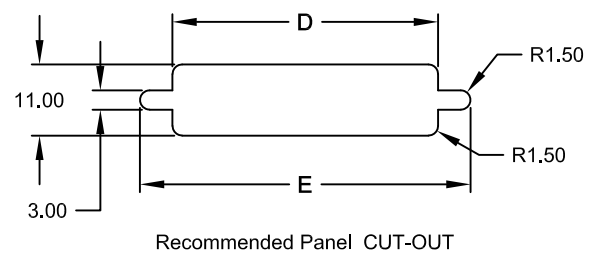

Panel Thickness
Screw "L" = 5.70 for Panel thickness "X" between 1.20~2.00mm

Specifications
Electrical
Current rating: 5A
Insulation resistance: 5000MΩ min.
Contact resistance: 10mΩ max.
Voltage rating: 250V AC rms max.
Withstanding voltage: 1000V AC rms

Material
Contact: Brass
Plating: Au flash over Ni
Insulator: PBT UL 94V-0
Shell: Steel
Plating: Ni
Operating temperature: -55°C to +85°C



Salt Spray: 48 Hours
Waterproof rating: IP 67 min.

E-tec 2019 © - all rights reserved



| UNIT | SCALE | GENERAL TOLERANCE | | DRAWN | DATE | DWG. NO. | SHEET 1/1 |
|------|-------|-------------------|------------|-------|------------|----------------------|-----------|
| mm | Free | X.° ± | X. ± | RH | 10.11.2006 | SDF-SIP01/T | REV. E |
| | | .XX° ± | .X ± | Ronny | 05.08.2019 | SERIES NO. | |
| | | .XX° ± | .XX ± 0.25 | Fagi | 05.08.2019 | SDF-xxx-SIP01-55/TXX | |
| | | .XXX° ± | .XXX ± | | | | |

Waterproof D-Sub "Female"
Standard
Solder Cup Type