


1.27mm pitch Female Header
 - THT - dual row straight & right angle

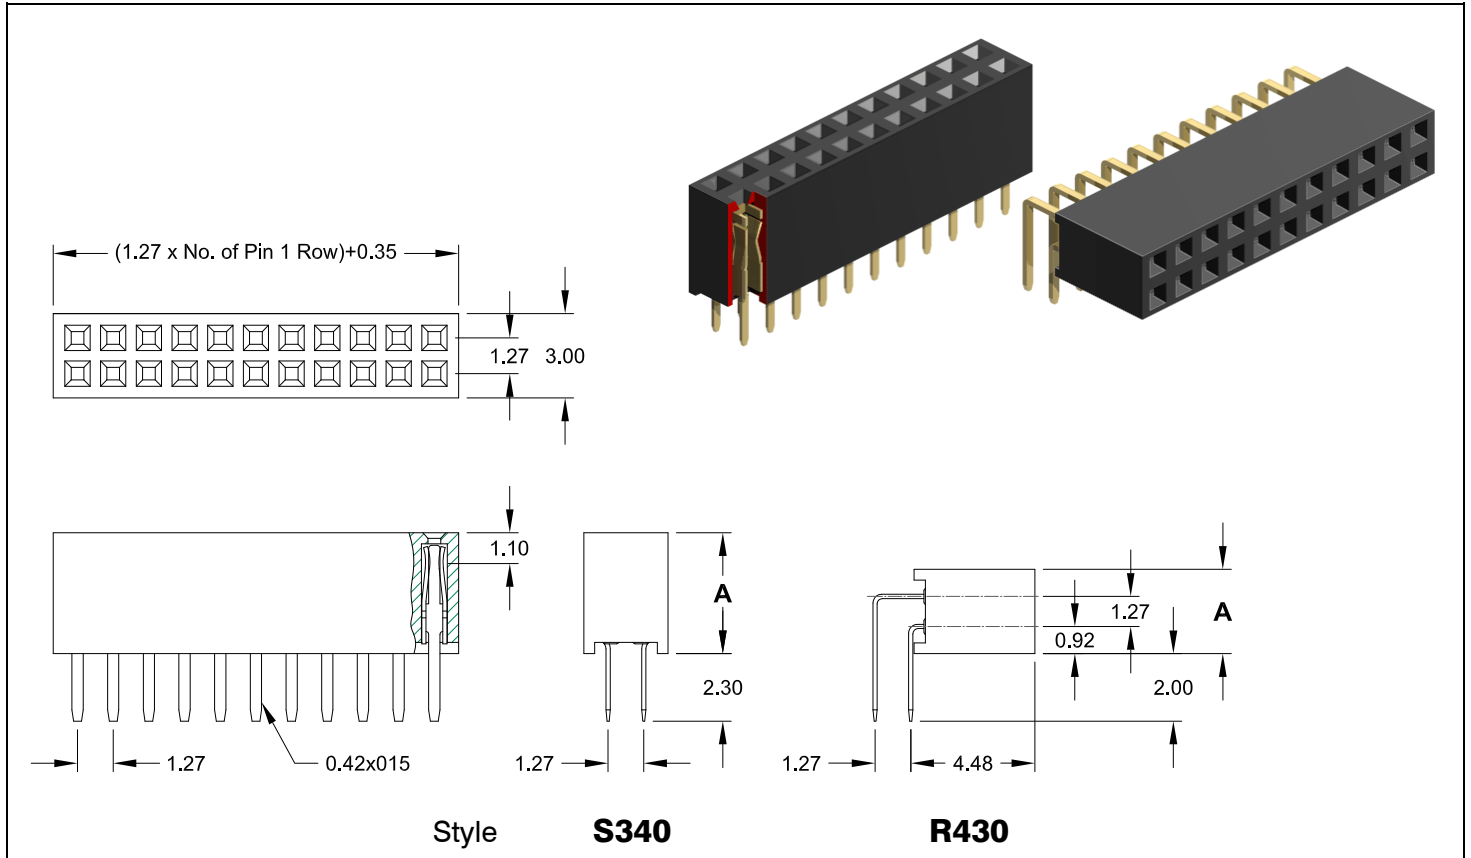


Style **S340**

R430

Application and Features

- 3.40 or 4.40mm height above board straight type
- Hi-rel dual beam contact assures reliable PC-Board connections
- Accepts 0.40mm square pins
- Stand-off's facilitate post solder cleaning
- Side stackable

PCB Hole Layout

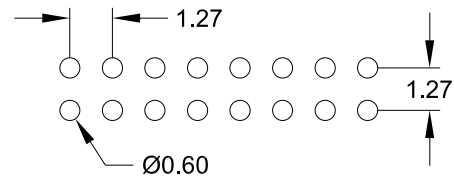

Specifications

Current rating	1 A	Operating temperature	- 40°C to +105°C
Insulation resistance	1000 MΩ min.	Contact material	(RoHS compliant) Phosphor Bronze
Contact resistance	20 mΩ max.	Insulator material	(RoHS compliant) LCP UL 94 V-0
Withstanding voltage	500 V AC		

How to order

BL2 - xxx - X xxx - 55/11

