
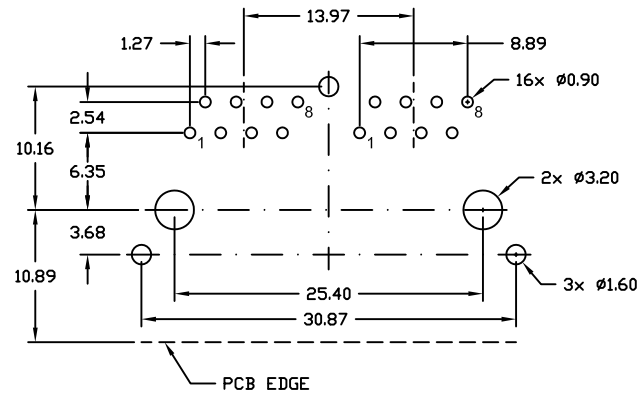
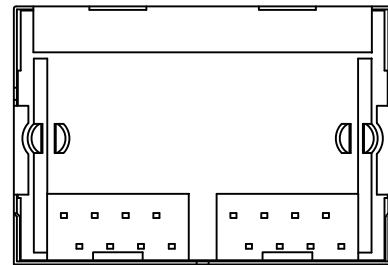
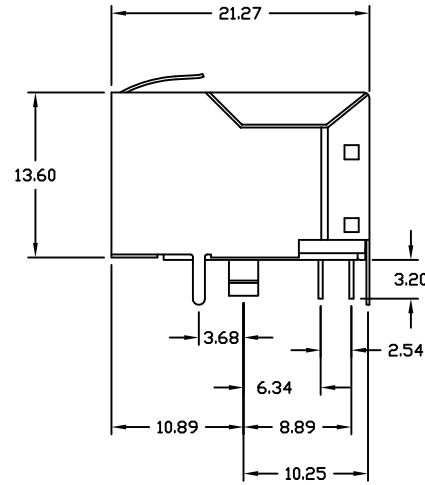


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A		NEW	23.12.1992	Jerry
B		New DWG. No.	01.02.2012	Ronny

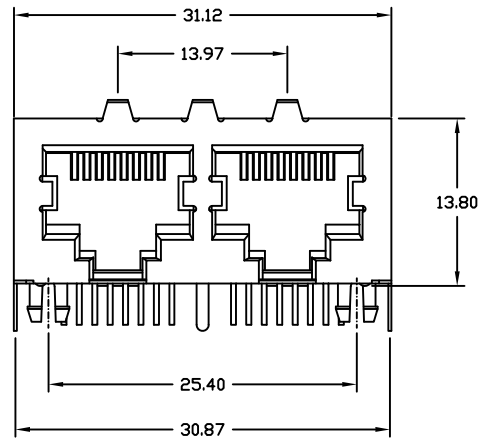

Recommended PCB Layout
Top View

Specifications

- Current rating: 1.5A
- Insulation resistance: 500MΩ min.
- Withstanding voltage: 1000V AC 1 Minute
- Contact resistance: 50mΩ max.
- Operating temperature: -40°C to +85°C

Materials

- Contact: PhBz; t=0.35mm
- Plating: Sn over Ni on solder area
Au over Ni on mating area
- Insulator: Thermoplastic UL 94V-0
- Shield: Brass; Nickel plated

PART NUMBER	GOLD PLATING CONTACT AREA
MJS-288-S1L0-95/1CT	3μ"
MJS-288-S1L0-96/1CT	6μ"
MJS-288-S1L0-97/1CT	15μ"
MJS-288-S1L0-98/1CT	30μ"
MJS-288-S1L0-9H/1CT	50μ"

UNIT	GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	SHEET 1/1
mm	X.° ±	X ± 0.50	Jerry	23.12.1992	2331500	REV. B
SCALE	.X° ±	.X ± 0.38	CHECK	01.02.2012		
Free	.XX° ±	.XX ± 0.25	Ronny	01.02.2012	SERIES NO.	
	ANG ± 3°	.XXX ± 0.10	APPROVE	01.02.2012	MJS-288-S1L0-9x/1CT	
			Hogi			

2-Port PCB Jack RJ45 <8P/8C>
THT side entry - long profile type
fully shielded
with top grd. latch

