
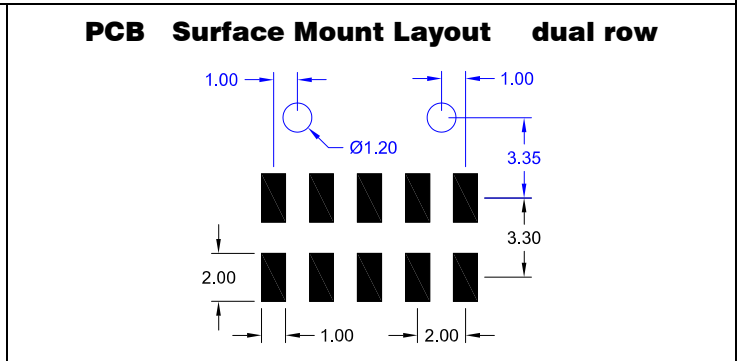
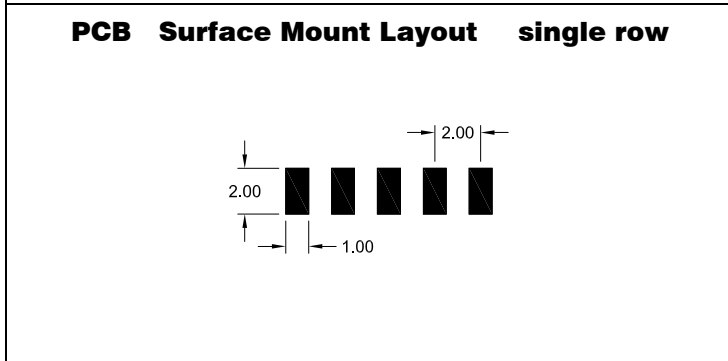


2.00mm pitch Pin Header - slanted -
- SMT - single and dual row

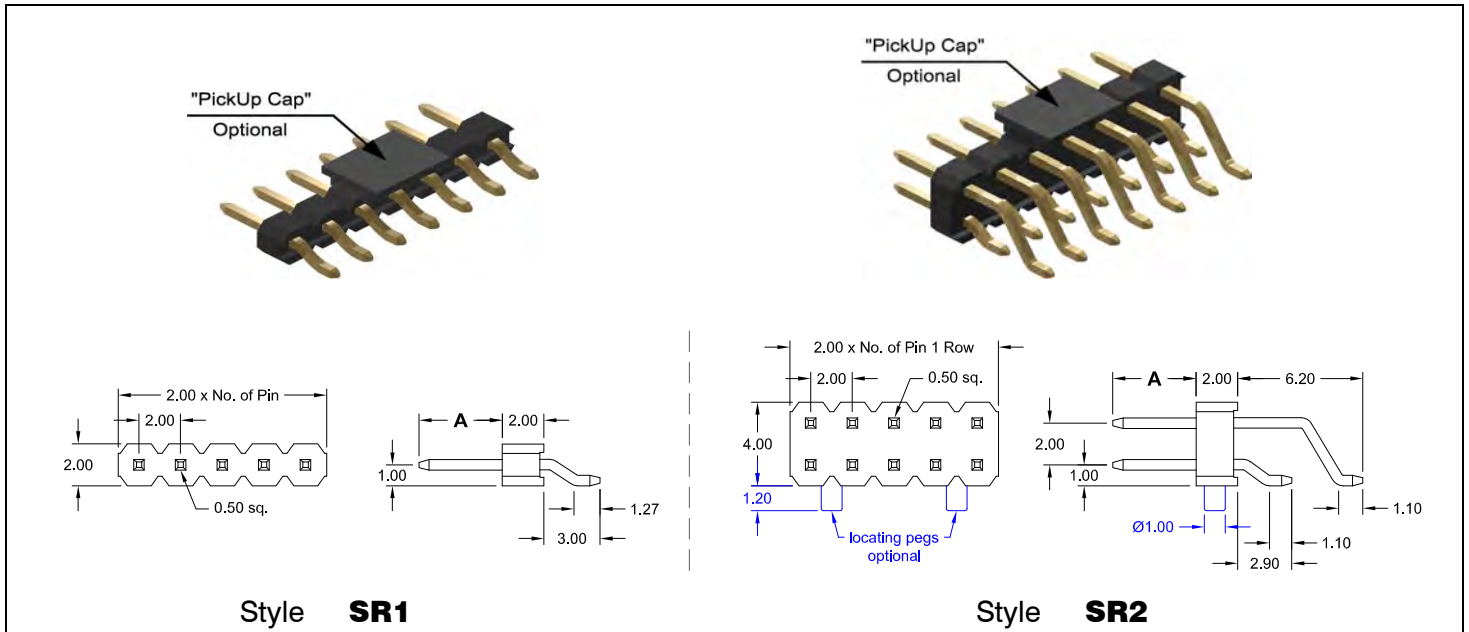

Specifications

Current rating 2 A
Insulation resistance 1000 MΩ min.
Withstanding voltage 500 V AC

Operating temperature - 40°C to +105°C
Processing temperature +250°C +0/-5°C for 5sec.
Contact material (RoHS compliant) Copper alloy
Insulator material (RoHS compliant) PA6T UL 94 V-0

How to order

SR x - xxx - H xxx/x - 55/2 X

Rows	Nbr of pins	Pin code	DIM "A"	Plating	Options
1 = single row	002 to 040	093/ 0	4.00 mm	55 = Gold other platings on request	without "locating pegs" A = Tube packing; with „PickUp Cap“ B = Reel packing; with „PickUp Cap“
		093/ 1	4.45 mm		
		093/ 2	3.20 mm		
		093/ 3	6.00 mm		
2 = dual row	006 to 080	122/ 0	4.00 mm		with "locating pegs" (Dual Row Type only) C = Tube packing; without "PickUp Cap" D = Tube packing; with "PickUp Cap" E = Reel packing; with "PickUp Cap"
		122/ 1	6.00 mm		
		122/ 2	4.45 mm		
		122/ 3	5.00 mm		
		122/ 4	3.20 mm		
		122/ 5	3.50 mm		
		122/ 6	8.00 mm		
122/ 7	4.80 mm				